


5KV Isolator v2 HVI237

DESCRIPTION


The 5KV Isolator HVI237 is an isolating converter providing true 3-way galvanic isolation up to 5kV rms. The HVI237 produces two unipolar output signals from one input signal (no isolation between outputs). The high input output isolation makes the unit suitable for monitoring DC power supplies used in transport and mining machinery. Final calibration is trimmed using the front accessible zero and span 15-turn trim adjustments. Maximum current drive is 20mA and maximum voltage drive is 16V. All units are fitted with a 500mS filter that can be changed on request. The unit is powered from a wide range auxiliary supply (10-60Vdc/16-48Vac or 80-300Vdc/80-280Vac) through a removable side plug in connector.

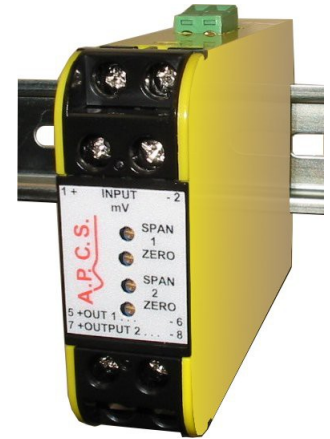

General Specifications

- Maximum Size: 23.5W x 71.5H x 109D (mm).
- Mounting: Clip for 35mm DIN-Rail.
- Housing material: ABS.
- Input / output termination: Top mounted screw terminals.
- Power termination: 2-way pluggable screw terminals
- Protection class: IP40 (IP55 Enclosure Opt).
- Weight: 0.120 kg.
- Protection class: IP40.
- Calibration accuracy: <0.2%.
- Front 'SPAN' adjust: ±25% typical.
- Front 'ZERO' adjust: +20/ -10% typical.
- Linearity: <0.1%.
- Long term drift: <0.1%.
- Temperature effect: Typically 0.025% of span per °C.
- Operating temperature: -10...+60°C.
- Current input impedance: Current 51 Ω (20mA)
- Voltage input impedance: 100kΩ/V, 100k minimum (< 100V)
10MΩ (> 100V)
- Output drive: 10mA into 0 – 1.6k Ω
20mA into 0 – 800 Ω
- Overload conditions: Span ≤ 10Vdc × 20
Span ≤ 1000Vdc × 3
Span 20mA × 20
Span 100mA × 3
Span Vac × 3
Span Iac × 3 (5 sec)
- Response time: 500ms (250µs to 5s optional)
- Input//output isolation: 5kV RMS.
- Supply//Input/output isolation: 4kV RMS.
- Electromagnetic compatibility: Complies with AS/NZS 4251.1 (EN 50081.1)

Block Diagram

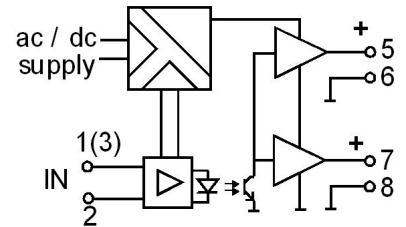

For input / output combinations refer to TYPE NO. DESIGNATION overleaf.


TYPE NO. DESIGNATION HVI237 - X X X X X

Power Supply:

- 1 = 10-60Vdc / 16-48Vac 50/60Hz
- 2 = 80-300Vdc / 80-280Vac 50/60Hz

Input:


- 1 = mA up to 100mA_{dc} (4-20mA default)
- 2 = V_{dc} 100mV to 100V_{dc} (0-10V default)




- *) 3 = mV link selectable select range from +/-100mV, 100mV, +/-250mV, 0-250mV

- 4 = High dc voltage specify range 100V to 2000V


- *) 6 = 1000V_{dc} (1000V specified on top label)



- *) 7 = 150/300V true RMS

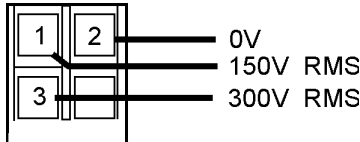


- *) 8 = 0-5A true RMS



- *) 9 = Other. (Specify).

- *) A = Vac true rms specify range input on terminals 1 and 2

- *) B = Two Input Vac selector (1% linearity).
IN1 Cal= specify (60V_{min} up to 300Vac)
IN2 Cal= specify (60V_{min} up to 300Vac)



mV Link Selectable Range Only

Four link selectable ranges are available when ordered with "Input: = 3"

Input	A	B	C	D
0-250mV	X			
0-100mV	X	X	X	
+/-250mV		X		X
+/-100mV	X		X	X

*) = Price Extra..

In the interest of development and improvement, A.P.C.S. Pty. Ltd. reserve the right to amend, without notice, details contained in this publication. A.P.C.S. PTY. LTD. will accept no legal liability for any errors, omissions or amendments.

Options

- 0 = None.
- *) 1 = Customised response time (Specify 250µs to 5s).
- *) 4 = 24V aux on terminal 4 to power field sensor.
- *) 9 = Other.

Output 2

- 1 = 4-20mA (source).
- 2 = 0-10V (source).
- 3 = 4-20mA (loop powered signal)
- *) 9 = Other specify

Output 1

- 1 = 4-20mA (source).
- 2 = 0-10V (source).
- 3 = 4-20mA (loop powered signal)
- *) 9 = Other specify

Connection

